


Switches and Accessories YC pre-charge module

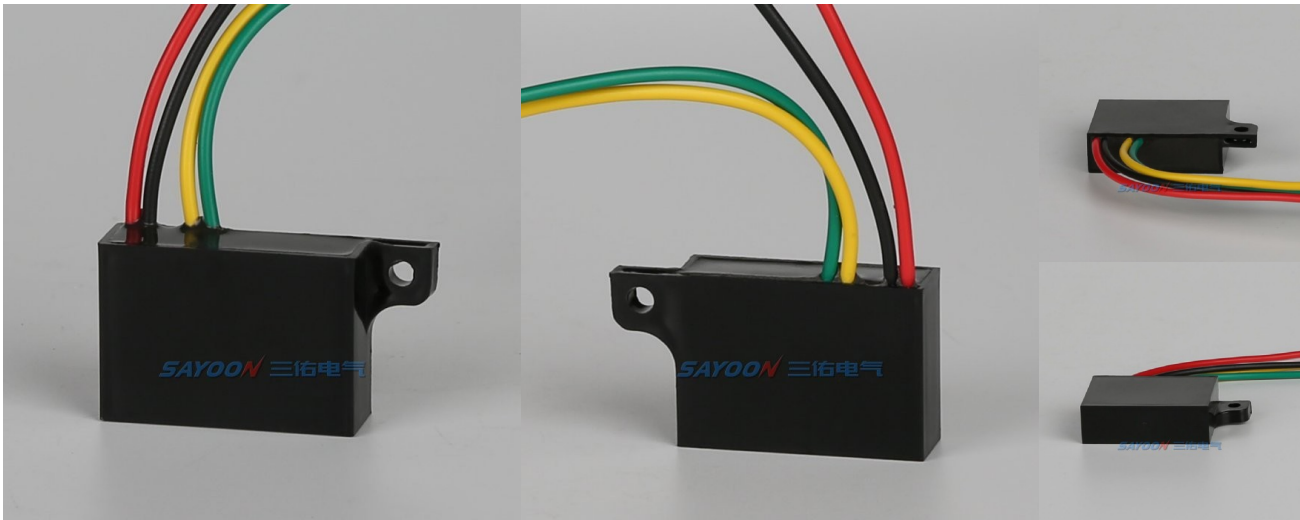

USES

It is used for the pre-charging function of DC contactors.

YC	-12	-100	-5	-A
1	2	3	4	5
1	Product type			
2	The coil voltage connecting the contactor			
3	Percentage after energy-saving power consumption			
4	Delay time (seconds)			
5	Type of connector for contact: A UT4(4mm); B 6.3Insert spring			

ORDER FORM DESCRIPTION


Note when ordering: The product cannot be used when the starting current exceeds the rated current of the pre charger module. Double coil contactors cannot be used, only single coil contactors can be used. If the user needs, special orders can be placed.

TECHNICAL PARAMETERS

(Version 1.00)

SAYOON Product Type	YC
Rated current	Short-term 3A, continuous 1A
Rated voltage	12V,24V,36V,48V,60V,72V
Input Terminal	Red: positive power input, black: negative power supply
Output Terminal (Connecting contactor)	Yellow: positive output, Green: negative power supply
Input line length	320mm
Output line length	150mm
Output interface	UT4 (4mm)
Wire specification	RV-0.3

INSTALLATION DIAGRAM

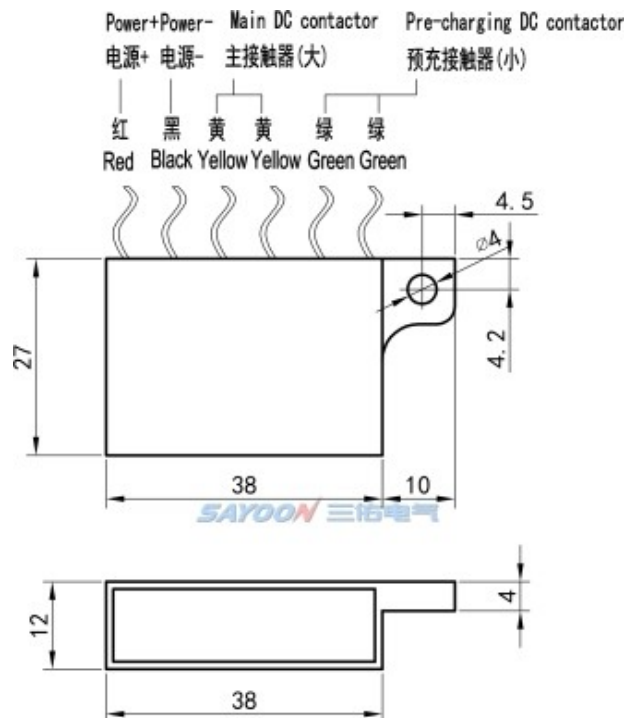

WIRING DIAGRAM

Power+Power- Main DC contactor Pre-charging DC contactor



Red Black Yellow Green Pink Blue

